


# PolyOCR

Robotic cell for OCR/DATAMATRIX reading

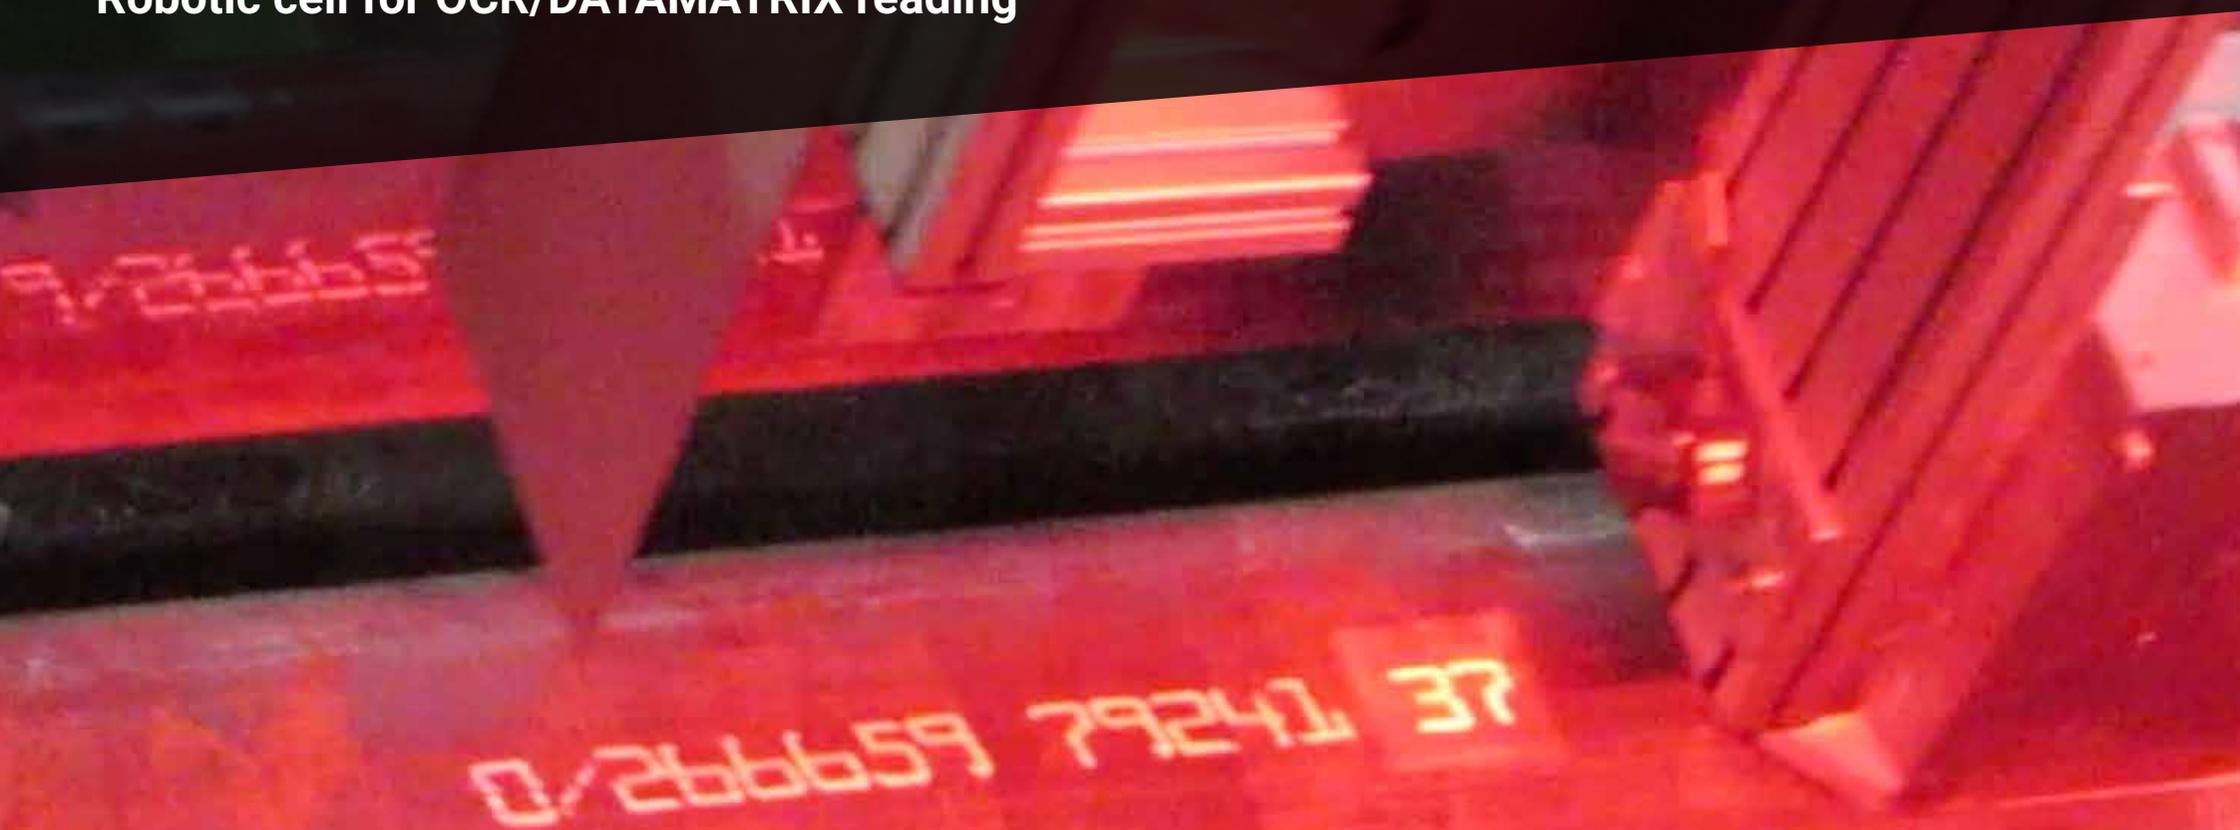

## ABOUT THE SYSTEM:

FULL AUTOMATIC

Ø IDENTIFICATION WITH ACCURACY OF 0,5 MM

MATRIX DATA SCANNER

ADVANCED ALGORITHM FOR COLLISION  
DETECTION TO GUARANTEE SAFETY

## USEFUL TO KNOW:

SAFETY | EFFICIENCY | TRACEABILITY

RELIABLE FEEDBACK ON YOUR PRODUCTION

4.0 FACILITATION CERTIFIABLE

## AVAILABLE:

**PolyMARK T: Robotized cell for marking pipes**

## TECHNICAL INFORMATION

- Cycle Time 16 s.
- Tube temperature - 10 + 40°C
- Tube thickness 6,35 - 38,1 mm
- Tube diameter 4 - 15 inches
- Tube size 6000 - 15.000 mm
- Marking size 500 mm

Technical support is always available but...  
**TAKE CARE OF YOUR ROBOT!**

Polytec suggests you to take care of robotic cells dedicating a couple of hours, once a week, to clean and to check most relevant components/ tools. Once a year, a one-day BM Service is worth.

Writing to [service@bmgroup.com](mailto:service@bmgroup.com) you can reserve the best time, according to production plans.

**HMI USER FRIENDLY**

**VPN REMOTE ACCESS & ASSISTANCE**

**SPECIAL SOFTWARE FUNCTIONALTIES FOR HOMING RECOVERY**

